
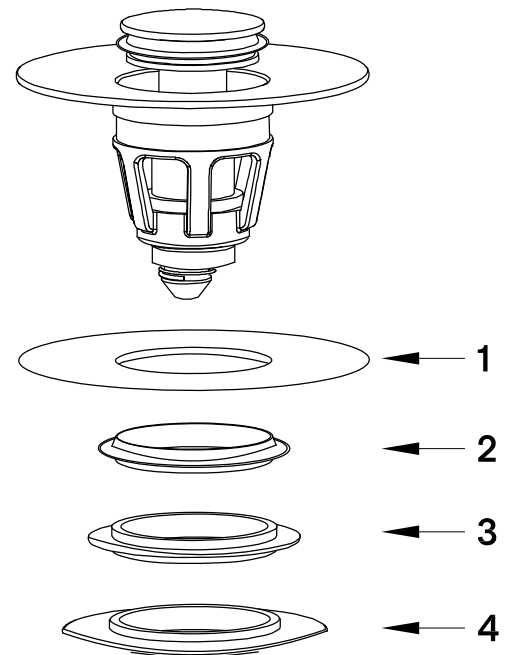
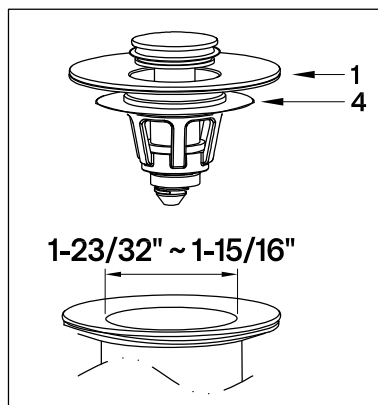
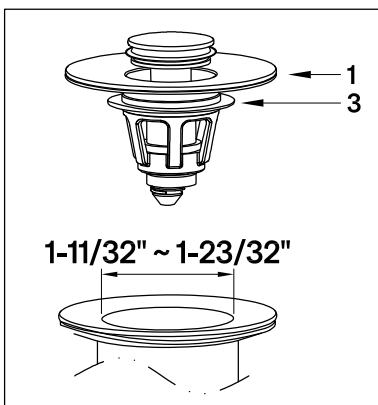
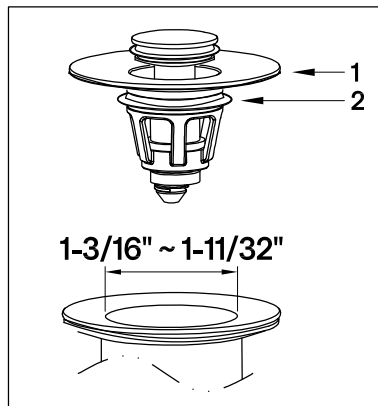


Installation Step:

- Remove existing drain stopper by unthreading in a counterclockwise direction.
- Your sink filter plug includes 4 rubber gaskets, clearly marked 1, 2, 3 and 4.
- Measure the inside diameter of your drain.
- Refer to table A to identify the gaskets to be installed on the sink plug :

I.D		
Min	Max	Gasket
1-1/16"	1-3/16"	1
1-3/16"	1-11/32"	1, 2
1-11/32"	1-23/32"	1, 3
1-23/32"	1-15/16"	1, 4

Insert the appropriate gaskets on the sink plug as shown on the image below insert plug into drain.

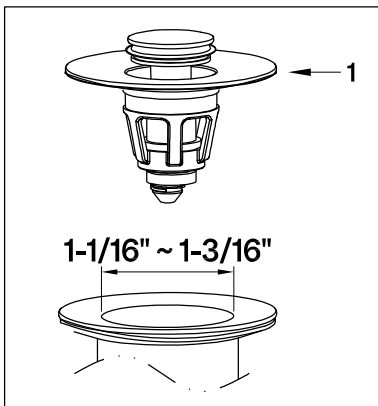

NOTICE

Failure to follow all directions may cause leaks
which may result in water damage

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710